

## SPECIFICATION DETAILS



# 1000/1200W MEDIUM ANGLE PROFILES BEAM SPREAD: 15-31 deg

### PR10-ZPM (Series I)

**Length** 730mm  
**Width** 253mm  
**Height** 360mm  
**Body** 198x198mm  
**Weight** 7.8kg  
 (Dimensions include the Yoke, Lock-off Knob etc.)



### PR12-ZPM

**Length** 730mm  
**Width** 253mm  
**Height** 360mm  
**Body** 200x237mm  
**Weight** 11.8kg  
 (Dimensions include the Yoke, Lock-off Knob etc.)



#### OPTICS

Both the PR10 & PR12 Luminaires are equipped with the same Optics Systems, featuring a wide range of Beam Angles and focusing capabilities which are practically unmatched.

#### LIGHT OUTPUT

Flat Field performance is excellent with an even distribution of light across the entire beam - drop-off from the centre to the edges is virtually NIL

#### FOCUS

Image focusing is very good across the entire beam angle range and rivals that of a con-

#### BODY CONSTRUCTION

Both Luminaire bodies are built using aluminum extrusions and high pressure die castings, for light-weight, robust performance with excellent heat dissipation characteristics.


The PR10 being the lighter of the two units is better suited to fixed applications, while the PR12 with its recessed Slider Knobs and heavier construction is better suited to heavy duty applications i.e. hiring or touring.

#### MAINTENANCE

Lampholders, Reflectors and Lenses are all accessible via quick access doors and sliding panels for fast, simple maintenance, while Sliding components are Teflon mounted for smooth, trouble-free operation.

#### SHUTTER ASSEMBLY (Beam Shapers)

Shutter assemblies are constructed using only Brass and

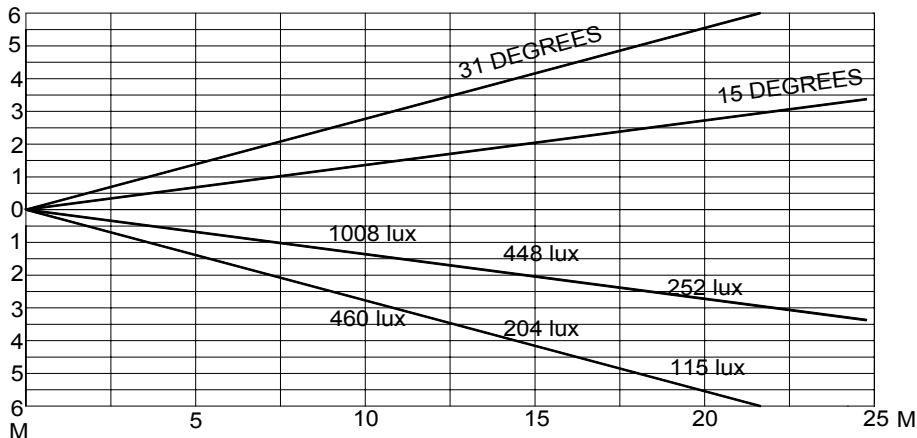

Stainless Steel components for long term reliability.

#### PAINT

External paint is heat and scratch resistant Powder Coat, with internal components being manufactured from Zinc Annealed Steel coated with high temperature heat resistant paint for superior corrosion resistance. All units are available in a wide

#### OPTIONAL ACCESSORIES

Iris Diaphragm  
 Standard Gobo Holder  
 Rotating Gobo Holder

#### WEATHER PROOFING

#### INCLUSIVE ACCESSORIES

Safety Cable, Gel Frame, Plug  
 Adaptor & Beam Shapers

#### LAMPHOLDER

Bender & Wirth GX 9.5

#### LAMPS

T19	1000W	700hrs
T29	1200W	400hrs

This Unit accepts a Standard "B" Size Gobo



**PROLITE MANUFACTURING PTY LTD**

A.C.N. 010 736 508

P.O. Box 1143, Toowoomba, Qld 4350. Tel. 1800 50 13 12 : Fax. (07) 4632 7439 <http://www.prolite.com.au>

All Specifications are subject to amendment without notice.

**MADE IN AUSTRALIA**